

svítidla AMPERA MIDI / 48 LED / 350 mA / 5145 / CW / 51 W

Project : VO Ceska Lipa - prechody ul. Bardejovska

File : ... \Desktop\VOESKL~1.BAR\prechod.lpf


## Summary

### Grid summary

Average type : Arithmetic (A) or Weighted (W)

Zakladni prostor A (1)	Min	Max	Ave (A)	Min/Max	Min/Ave
Illuminance (lux)	25,1	54,2	33,5	46,4	75,1
Doplnkovy prostor B1 (2)	Min	Max	Ave (A)	Min/Max	Min/Ave
Illuminance (lux)	21,1	25,5	22,6	82,8	93,5
Doplnkovy prostor B2 (3)	Min	Max	Ave (A)	Min/Max	Min/Ave
Illuminance (lux)	31,9	42,0	36,1	76,0	88,4

Current view Configuration (1)

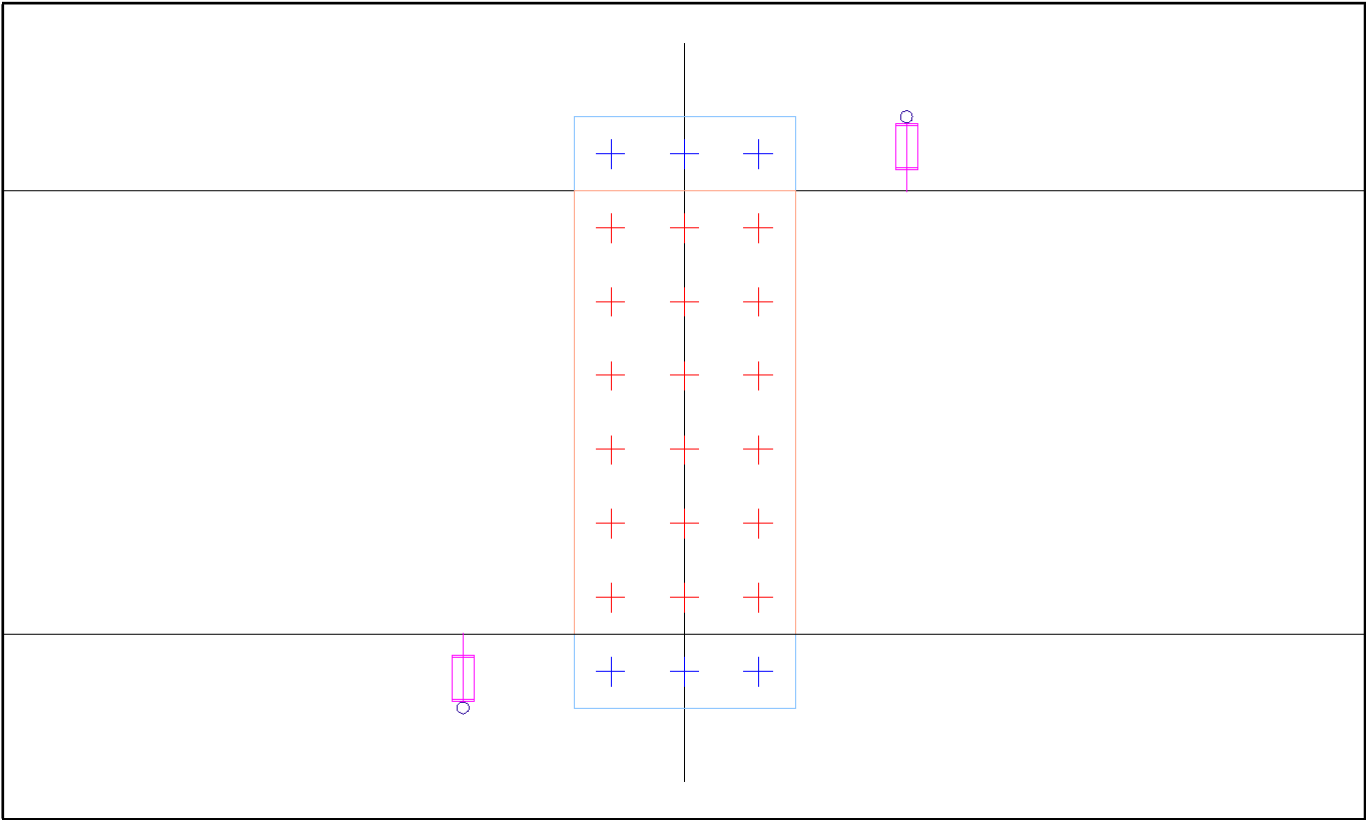

**Grid results**

Average type : Arithmetic (A) or Weighted (W)

**Zakladni prostor A (1) : Illuminance [lux]**

Min : 25,1 lux


Ave (A) 33,5 lux

Max : 54,2 lux

Uo : 75,1 %

Ug : 46,4 %

5,500	42,5	54,2	35,5
4,500	33,7	44,5	27,8
3,500	29,1	36,4	27,8
2,500	28,1	36,5	29,4
1,500	27,6	36,0	29,6
0,500	25,1	32,2	26,3
Y/X	-1,000	0,000	1,000

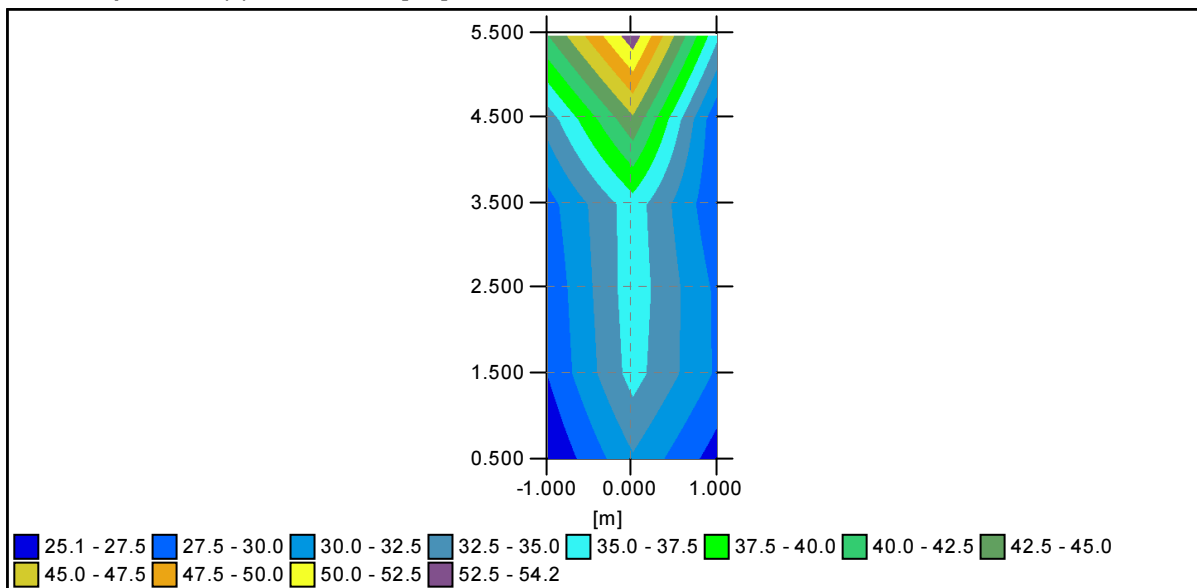**Zakladni prostor A (1) : Illuminance [lux]**

**Doplňkový prostor B1 (2) : Illuminance [lux]**

Min : 21,1 lux

Ave (A) 22,6 lux

Max : 25,5 lux

Uo : 93,5 %

Ug : 82,8 %

-0,500	21,1	25,5	21,1
Y/X	-1,000	0,000	1,000

**Doplňkový prostor B2 (3) : Illuminance [lux]**

Min : 31,9 lux

Ave (A) 36,1 lux

Max : 42,0 lux

Uo : 88,4 %

Ug : 76,0 %

6,500	31,9	42,0	34,4
Y/X	-1,000	0,000	1,000

**General information****Configuration details**

## • Configuration (1)

Activated ☒

Matrix	Description	Flux	MF	Luminaire
348062	C:\Program Files (x86)\Schreder\Lighting\Matrices\348062.mat	7,7	0,80	No Picture

**Group details**

Single								
	N°	Start			Luminaire			
		X	Y	H	Matrix	Az	Inc	Rot
✓	1	-3,000	-0,500	6,000	348062	0,0	5,0	0,0
✓	2	3,000	6,500	6,000	348062	180,0	5,0	0,0